


FASTENERS & COMPONENTS

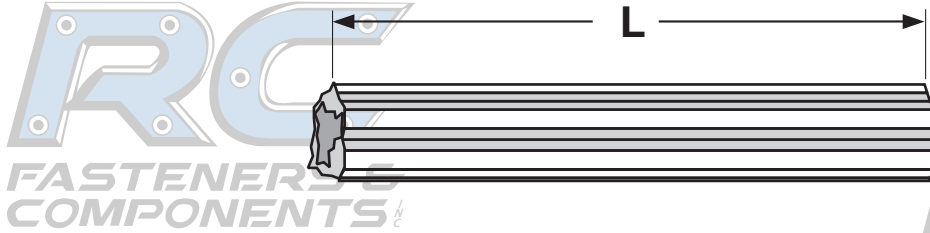

RC

FASTENERS & COMPONENTS

FLUTED PLASTIC ANCHOR					
Screw Size	Length of Anchor	Drill Size	Minimum Embedment Depth	Performance Information	
				In 4000 psi. Concrete	
				Tensile	Shear
4-6	1	3/16	1	140	215
10-12	1	1/4	1	490	350
14	1 1/2	5/16	1 1/2	615	575

RC
FASTENERS & COMPONENTS

Description	An injection-molded anchor with protruding ribs that extend from end to end. The openings at either end of the anchor are identical.
Applications/ Advantages	The fluted plastic anchor is a light-duty part that can be used in stone, concrete, hollow block or brick. It is not suited for applications where holding power is important and should not be installed in overhead areas. For use with self-tapping or wood screws.
Material	Engineered plastic
Tensile & Shear strength*	See above table. These vales should be reduced by at least 75% to determine the safe working load in each application.

RC
FASTENERS & COMPONENTS

RC

FASTENERS & COMPONENTS

RC
FASTENERS & COMPONENTS