


FASTENERS & COMPONENTS

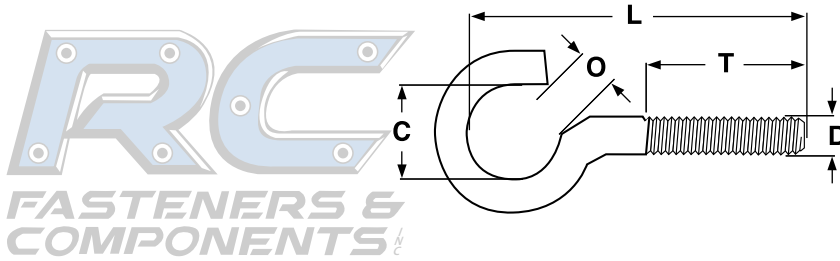

FASTENERS & COMPONENTS

OPEN END EYE BOLTS									
Standard Sizes	C		O		T	D		L	
	Inner Curve Diameter		Diameter of Opening		Threaded Portion	Major Diameter		Nominal Length	
	Max	Min	Max	Min	Min	Max	Min	Max	Min
1/4-20 x 3"	.650	.550	.410	.310	1.75	.2489	.2408	3.06	2.94
5/16-18 x 3-3/4"	.750	.650	.410	.310	2	.3113	.3026	3.84	3.69

FASTENERS & COMPONENTS

Description	An externally threaded fastener with a unified thread pitch and a blunt point. At the end opposite the gimlet point the unthreaded section of the shank is turned into an incomplete circle leaving an opening of a specified distance through which a closed-end eye bolt or screw may pass.
Applications / Advantages	A convenient part that may be used as a temporary fastening in overhead applications for suspending light weights for a short period of time. One example of an end use is when a garage door assembly is installed by a single person; an open end eye bolt, s-hook and screw eye can be used, under proper conditions, to temporarily suspend a garage door opener mechanism while the permanent suspension device is being set in place.
Material	Low carbon cold drawn steel
Plating	Eye-bolts are typically supplied with a zinc finish.

FASTENERS & COMPONENTS

FASTENERS & COMPONENTS